

18000 Gal Skid Tank 250 PSI LPG Storage Tank 102" OD x 52" OAL with Skid



Specifications

- New manufactured tank w skid.
- ASME Section VIII/Div 1 code compliant
- National board certified

- Fully valved at factory and leak tested
- No over width permitting needed.
- Built to tough, oil field rugged construction, is our standard.


Contact us today to learn more about LPG Skid Tanks and how Liquid Partners can fulfill your LPG tank needs.

CANADA: + 1 800 205-6871 · USA: +1 850-698-7192 · MÉXICO: +521 811-790-48-02

Email: Jestes6@aol.com



18000 Gal Skid Tank 250 PSI LPG Storage Tank 102" OD x 52" OAL with Skid

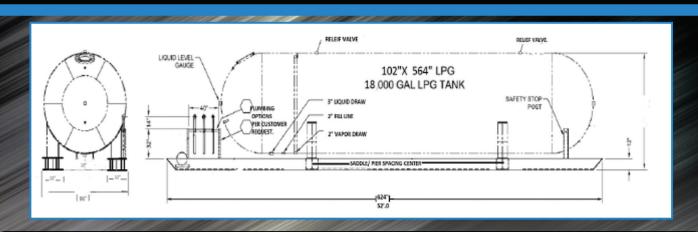

18,000 GALLON STORAGE TANK / WITH STEEL SADDLES and skid

- Dbl I beam Skid 6" height X 52 " long
- · Steel saddles 6"height
- 250 LB. WORKING PRESSURE / 102" OD
- COMPLETE NEW VALVE PACKAGE
- (1) Visual Sight Gauge installed
- (1) 3/4" Combo Valve at 85% level w/Vent Valve & Liquid filled #400psi pressure gauge
- (1) 3" MEC 2 way Internal Valve rated 300gpm for liquid outtake for pump
- (2) 2" MEC 2-way Internal Valves rated 250gpm: (1) for liquid in and (1) for Vapor Service
- All placards and signage are included with tanks to be installed after tank transport
- Hose Rack to protect hoses from ground exposure and tripping hazards

OPERATED BY VAPOR PRESSURE, NITROGEN, OR CUSTOMER SUPPLIED PRESSURE SOURCE (DRY AIR, CO2)

- Truck loading / unloading ESV's (Provides protection at bulkhead)
- (1) 2' Snappy-Joe w/ Pneumatic Shut Down
- (1) 1 ¼" Snappy-Joe for Vapor Equalizing Connection between Truck and Tank
- (1) 2" Sight flow back check to visually confirm movement and unloading of product into Tank
- 14" Risers connected to Pneumatic System to provide System Shut Down in the event of pull away

CUSTOMER OPTIONS:

- Blackmer 3" Pump, Motor, Base Assembly, 10HP 3-Phase motor w/ bypass. Approx 170gpm
- Blackmer 2" Pump, Motor, Base Assembly, 7 HP Single Phase Motor w/ bypass. Approx 70gpm
- Liquid Controls Meter 2" or 3" designed to customer specs
- · Bulkhead can be configured on either side of the Tank
- Fitted with Openings and fitted with desired equipment at both ends
- Configured with or without pumps
- Hose Rack to protect hoses from ground exposure and tripping hazards
- Tanks must and will be constructed to meet or exceed NFPA 58, 2011 code requirement

Contact us today to learn more about LPG Skid Tanks and how Liquid Partners can fulfill your LPG tank needs.

CANADA: + 1 800 205-6871 · USA: +1 850-698-7192 · MÉXICO: +521 811-790-48-02

Email: Jestes6@aol.com